


| Main technical indicators(主要技术指标) |                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------|
| 1.Mating (插拔次数)                   | 5000                                                                                                               |
| 2.Working Temperature (温度)        | -55~+150 ℃                                                                                                         |
| 3.IP Rating (防护级别)                | IP 50                                                                                                              |
| 4.Diameter of socket end(插合端直径)   | ø1.6                                                                                                               |
| 5.Testing Voltage (测试电压)          | 1600V                                                                                                              |
| 6.Working Voltage (工作电压)          | 1150V                                                                                                              |
| 7.Rated Current (额定电流)            | 17A                                                                                                                |
| 8.Shell material(壳体材质)            | Brass (chromium plating) shell and chuck nut/( nickel plating) pin sleeve and middleware/黄铜（镀铬）外壳和夹头螺母/（镀镍）插销套和中间件 |
| 9.Pin Material(插针材料)              | Copper alloy gold plating(铜合金镀金)                                                                                   |
| 10.Insulator material(绝缘体材质)      | PPS                                                                                                                |


| Sum up(总结)                 |                                      |
|----------------------------|--------------------------------------|
| Series(系列)                 | B                                    |
| Shell style/model（外壳样式/型号） | THG: Elbow plug, cable collet/电缆夹头弯头 |
| Button（按键）                 | A button(一个按键)                       |
| Termination type（终止类型）     | Male solder(公焊锡)                     |
| Line diameter awg(线材直径)    | 24~16AWG                             |
| Cable diameterø（电缆直径）      | ø5.3-6.2MM                           |
| Matching parts(配件)         | ZGG.3B.P06.CLL                       |

| Location pin combination(定位销组合) |                                      |           |                         |
|---------------------------------|--------------------------------------|-----------|-------------------------|
| (编号)<br>Number                  | Number of<br>positioning pins(定位销数量) | Angle(角度) | Series(系列)~3B           |
| G                               | One(1)                               |           | (Zero degrees)0°        |
| A                               | Two(2)                               | A         | Thirty degrees(30°)     |
| B                               | Two(2)                               |           | Forty-five degrees(45°) |
| C                               | Two(2)                               |           | Sixty degrees(60°)      |
| D                               | Two(2)                               | γ         | 95 degrees（95°）         |
| E                               | Two(2)                               | β         | 120 degrees(120°)       |
| F                               | Two(2)                               |           | 145 degrees(145°)       |
| J                               | Two(2)                               | A         | 37.5degrees(37.5°)      |
| K                               | Two(2)                               |           | 52.5degrees(52.5°)      |
| L                               | Two(2)                               | γ         | Seventy degrees(70°)    |


|        | A      | B      | C√     | ANGLE   |       |
|--------|--------|--------|--------|---------|-------|
| 5-10   | ±0.02  | ±0.05  | ±0.1   | 0°-30°  | ±0.1° |
| 50-100 | ±0.1   | ±0.15  | ±0.2   | 61°-90° | ±0.5° |
| 50-100 | ±0.15  | ±0.2   | ±0.25  |         |       |
| 100-   | ±0.15% | ±0.20% | ±0.25% |         |       |

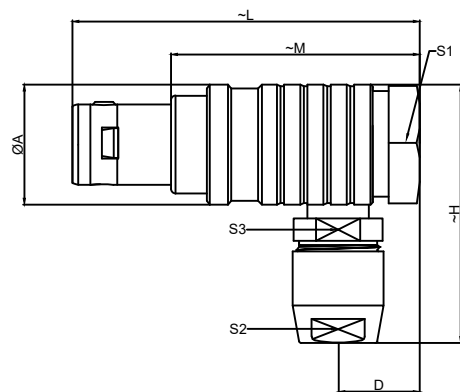

|    | A     | D      | H      | L      | M     | S1     | S2     | S3     |
|----|-------|--------|--------|--------|-------|--------|--------|--------|
| MM | 19    | 10     | 37     | 50.0   | 35    | 17     | 14     | 15     |
| in | 0.748 | 0.3937 | 1.4567 | 1.9685 | 1.378 | 0.6693 | 0.5512 | 0.5906 |



Welded surface  
(焊接面)



Positive view  
(正视图)



Solder core  
(焊接型公胶芯)

TH G. 3B. P06.C L A D 62

|                                 |                          |
|---------------------------------|--------------------------|
| Model(型号)                       | TH G. 3B. P06.C L A D 62 |
| Positioning pin(定位销)            | TH G. 3B. P06.C L A D 62 |
| Series(系列)                      | TH G. 3B. P06.C L A D 62 |
| Needle core configuration(针芯配置) | TH G. 3B. P06.C L A D 62 |
| Outer casing(外壳)                | TH G. 3B. P06.C L A D 62 |
| Insulator(绝缘体)                  | TH G. 3B. P06.C L A D 62 |
| Needle core(针芯)                 | TH G. 3B. P06.C L A D 62 |
| Type of clamp(线夹类型)             | TH G. 3B. P06.C L A D 62 |
| Cable diameter(电缆直径)            | TH G. 3B. P06.C L A D 62 |

|                                  |  |          |  |                                      |          |                                        |
|----------------------------------|--|----------|--|--------------------------------------|----------|----------------------------------------|
| DESIGNED (设计)                    |  | DATE(日期) |  | SCALE(比例)                            | N/A(不适用) | MODEL TYPE<br>型号类型: THG.3B.P06.CLAD.62 |
| CHECKED (校对)                     |  | DATE(日期) |  | VIEW(视图)                             |          | PART NO. 3B6-core plug<br>名称: 3B6芯插头   |
| APPROVED (审核)                    |  | DATE(日期) |  | UNIT(单位)                             | MM       | DWG NO.:                               |
| REVISIONS                        |  |          |  | MATERIAL (材料)                        |          |                                        |
| www.helloxkb.com www.helloxkb.cn |  |          |  | XKB INDUSTRIAL PRECISION CO.,LIMITED |          | WEIGHT(重量) SHEET(表) REVISION(修订)       |
|                                  |  |          |  |                                      |          | 1/1 A0                                 |